

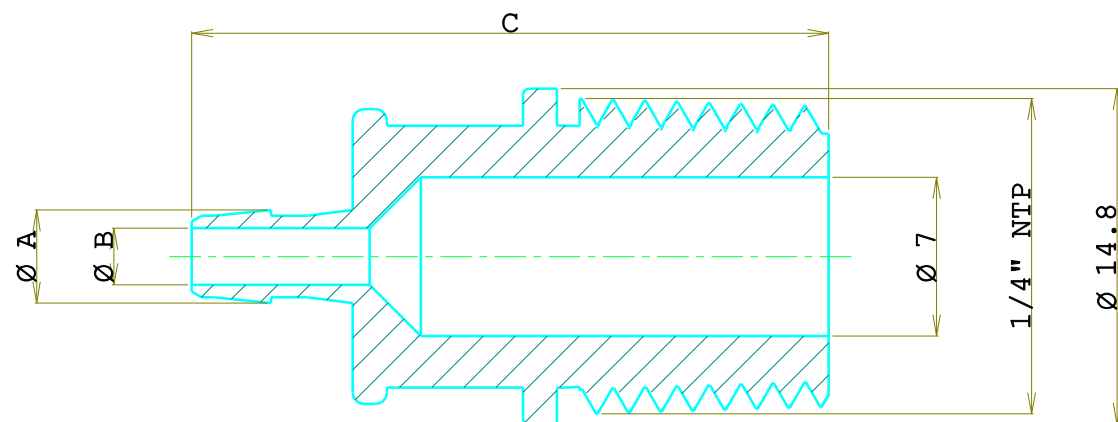


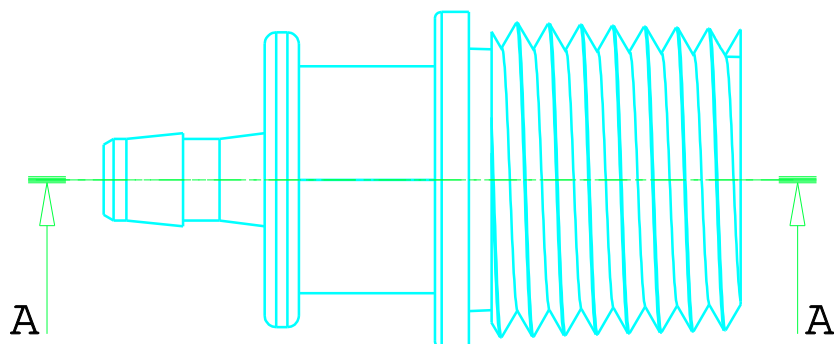

Sez. A-A

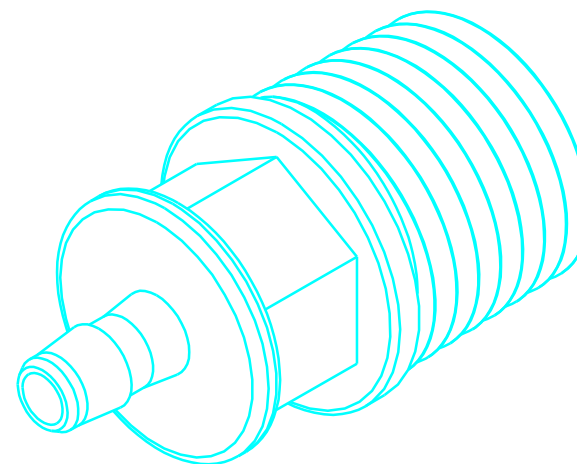

0.2 BURRS ALLOWED

| CODE       | ØA   | ØB   | C    |
|------------|------|------|------|
| ST230_3214 | 4.75 | 2.00 | 26.9 |
| ST230_4014 | 5.90 | 2.45 | 28.1 |
| ST230_4814 | 7.15 | 2.95 | 30.5 |
| ST230_6414 | 8.60 | 3.95 | 32.5 |

3

2

Updated title block

Changes

Coccaglio 1

Signature

22/05/2026

Date



Via Lavoro e Industria  
25030 Rudiano (BS)

**M0803.04** rev.01 del 02/02/2024

General tolerances **ISO 2768-mk**

0.5 < x ≤ 6 ± 0.1

6 < x ≤ 30 ± 0.2

30 < x ≤ 120 ± 0.3

120 < x ≤ 400 ± 0.5

**Mould Denomination**

**N° Cavities**

**Order**

**Member Denomination**

TUBE TO THREAD STRAIGHT CONN. X, X-1/4"

**Customer code**

**Customer part**

SEE TABLE

**Date**  
10/02/2026

**Molding Material**  
PA6

**C.tion**  
-----

**Machine**  
-----

**Mould Weight**  
-----

**Drawn By**  
G.Coccaglio

**Approved By**  
Direzione C.A.

**Eyebolts**  
-----

**Mould Dimensions**  
-----

**N°Par.**

**N°Pez.**

**Dimensions**

**Material**

**Treatment**

**Scale**

3:1

**A4**

**Sheet**

1/1